


TPS-M6U(72)-220W 220W Mono Crystalline Solar Module



Not Your Average Solar Provider

Our Products Categories

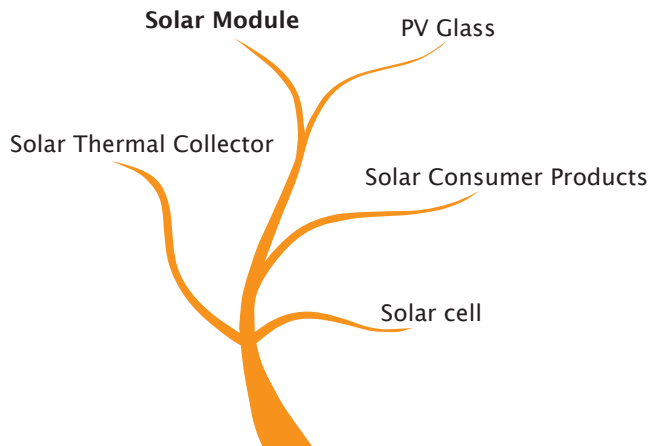

Professional Solar Provider Since 1992


Key Feature

- Plus power tolerance: 0~3%
- Independent research anti-reflective and self-cleaning glass surface reduces power loss from dirt and dust
- Excellent performance under low light environments, create better kWh/kW ratio and produce average 2-3% more electricity

Best Quality

- Junction box and bypass diodes guarantee the modules free of overheating and "hot spot effect"
- 100%EL double-inspection ensures modules are defects free

Electrical Characteristics

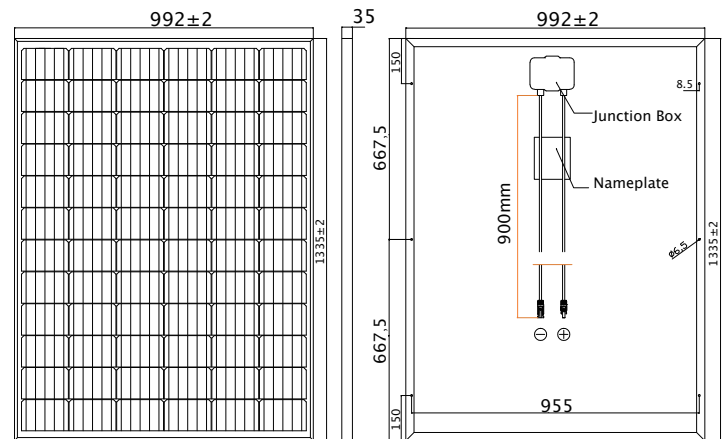

MECHANICAL SPECIFICATION

Cell Type	Mono crystalline 156×104mm
Number of cells	72pcs
Dimensions(A×B×C)	1335×992×35mm
Front Glass	3.2mm Low iron tempered glass
Frame	Anodized aluminum alloy
Connector	MC4 PLUG
Output Cables	Length 900mm

PERFORMANCE AT STANDARD TEST CONDITION (STC:1000W/m²,25°C,AM1.5)

Module Series	TPS-M6U(72)-220W
Maximum Power at STC(Pmax)	220W
Open Circuit Voltage(Voc)	43.2V
Short Circuit Current(Isc)	6.53A
Maximum Power Voltage(Vmp)	36.0V
Maximum Power Current(Imp)	6.13A

ABSOLUTE MAXIMUM LIMITS

Parameters	Unit	Rating
Operation temperature	°C	-40 to +85
Storage temperature	°C	-40 to +85

DEALER INFORMATION BOX